


DMX RGBAWP

EUROLITE LED Z-1000 Beam Effect

Mushroom with single-color LEDs in R, G, B, A, W and P

- Mushroom with rotating beams in different color combinations
- Equipped with six bright 3 W LEDs
- Operable in stand-alone mode or via DMX (occupies 10 channels)

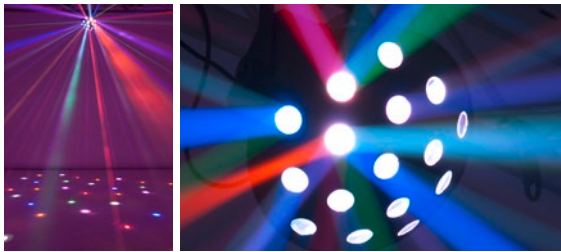

No. 51918221

Technical specifications:


Power supply:	100-240 V AC, 50/60 Hz~
Power consumption:	23 W
Number of DMX channels:	10
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
LED type:	3 W
Number of LEDs:	6 (1 x R, 1 x G, 1 x B, 1 x A, 1 x W, 1 x P)
Beam angle:	115°
Dimensions:	310 x 275 x 280 mm
Weight:	2 kg

RGBAW + UV

EUROLITE LED Z-20 Beam Effect

Classic beam effect with 6 single color LEDs

- Equipped with 6 x 3 W LED: red, green, blue, amber, white, UV
- Sound-control or auto mode
- Modifiable program speed

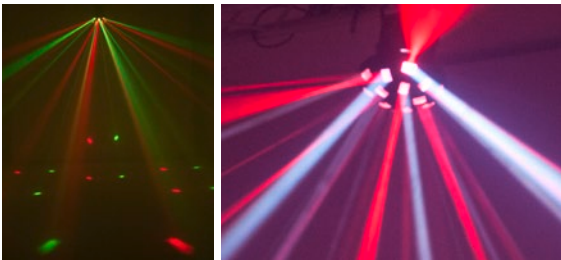

No. 51918524

Technical specifications:


Power supply:	100-240 V AC, 50/60 Hz ~
Power consumption:	16 W
Sound-control:	via built-in microphone
LED type:	3 W
Number of LEDs:	6: 1 x red, 1 x green, 1 x blue, 1 x amber, 1 x white, 1 x UV
Dimensions (LxWxH):	315 x 280 x 280 mm
Weight:	2 kg

NEW DMX RGBAW

EUROLITE LED SCY-400 Beam Effect

Classic beam effect

- 1 row of 4 glass lenses
- Equipped with 20 LEDs with RGBAW colors
- Each lens can be controlled individually via DMX
- DMX512 control via regular DMX controller
- Additional controlling possibility via the EUROLITE IR-7 remote control, included in delivery

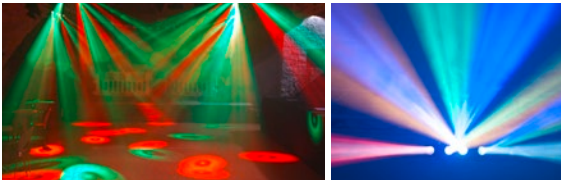

No. 51918676

Technical specifications:


Power supply:	100-240 V AC, 50/60 Hz ~
Power consumption:	40 W
Number of DMX channels:	4/7
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
LED-Type:	3 W RGBAW
Number of LEDs:	20
Dimensions (LxWxH):	500 x 225 x 220 mm
Weight:	3.5 kg

DMX QCL RGBW

EUROLITE LED SCY-3 Beam Effect

Bright LED architectural spot with IR remote control

- Equipped with 3 x 10 W QCL (quadcolor LED) in red, green, blue and white
- Supports QuickDMX for wireless reception of DMX signals
- Uplight for fan and beam effects on walls
- Flicker-free projection
- TILT angle manually adjustable

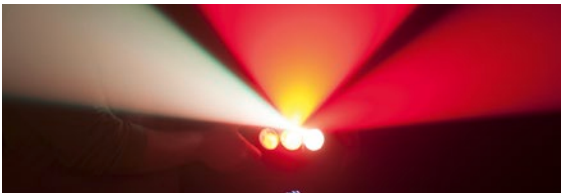

No. 51918668

Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	25 W
QuickDMX connection:	5-pin XLR
Sound-control:	via built-in microphone
LED type:	10 W QCL
Number of LEDs:	3
Dimensions (LxWxH):	273 x 80 x 212 mm
Weight:	2.5 kg
Remote control:	
Power supply:	CR2025 button cell 3 V

