



CW

EUROLITE AKKU PST-3W 6300K Pinspot

Powerful battery-powered LED pinspot for mobile use

- One super bright white 3 W LED (Cree)
- Magnetic base affixes to metal surfaces
- Movable and tiltable mounting bracket with safety eyelet and scissor clip for easy attachment to drop ceiling supports
- Incl. IR remote control for brightness control and switching on and off
- 5 color foils included in delivery for special effects



No. 41700600

Technical specifications:

Power supply:	7.4 V, 2200 mAh (16.28 Wh) via li-ion battery pack
	8.4 V, 1 A via charger (230 V, 50 Hz)
Power consumption:	8.4 W
Battery operation:	6 hours
Recharging time:	3 hours
LED type:	Cree 3 W
Number of LEDs:	1
Color temperature:	6300 K
Beam angle:	5°
Dimensions (LxW):	195 x 90 mm
Weight:	0.4 kg




HCL

RGBAW + UV

EUROLITE AKKU Wash 1 HCL Spot

Handy battery-powered LED washlight with 10-W-HCL (6in1)

- With one bright 6in1 HCL LED in the colors red, green, blue, white, amber and UV
- Up to 6 hours operating time
- Magnetic base affixes to metal surfaces
- Movable and tiltable mounting bracket and scissor clip for easy attachment to drop ceiling supports
- Flicker-free and very wide projection
- Controllable via EUROLITE IR-7 remote control; included in delivery

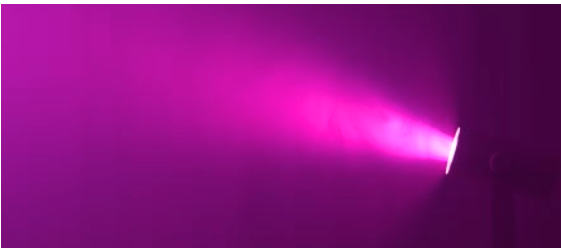

No. 41700620

Technical specifications:

Power supply:	8.4 V, 1.35 A via charger (100-240 V AC, 50/60 Hz)
Power consumption:	8.4 W
Battery pack type:	Li-ion 7.4 V, 4400 mAh (32.56 Wh)
Battery operation:	6 hours
Recharging time:	5 hours
Battery remote control:	CR2025 button cell 3 V
Sound-control:	via built-in microphone
LED type:	10 W HCL
Number of LEDs:	1
Beam angle:	22°
Dimensions (LxW):	205 x 92 mm
Weight:	0.8 kg

NEW

EUROLITE SB-4C softbag with charger

Softbag with multi-charger for 4 AKKU washlights

- Black transport bag for 4 AKKU washlights/pinspots
- Integrated multi-charger for easy charging of the fixtures
- Accessory compartment
- Interior upholstery helps secure and safeguard the fixtures during transportation



No. 41700621

Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz
Output current:	10 V DC/5 A
Dimensions (LxWxH):	700 x 320 x 100 mm
Weight:	1 kg