

SDI-1

00279

DESCRIPTION

This stereo DI-box is the perfect problem-solver for many applications.

FEATURES

- This stereo DI-box is the perfect problem-solver for many applications!
 - Converts unbalanced audio signals to balanced so they can be transported over long symmetric cables with maximal protection against interferences of all kinds.
 - Humming noises coming from laptops, PCs and many others can be easily solved: the ground lift switches separate the in/outputs to avoid any ground loops.
- No active components inside: no noisy op-amps and no empty batteries when you need them ...
- Separate ground lift switches for both channels
- Very high grade audio transformers for excellent audio characteristics:
 - Very low distortion:
 - Supports very high audio levels
 - Excellent CMRR: >80dB @ 60Hz
 - Excellent freq. response: 20Hz - 20kHz (+/-0.5dB)
- Versatile connections:
 - Inputs: RCA + COMBO (Jack/XLR) on both channels
 - Outputs: XLR-male on both channels
- Rugged black anodized ALU housing






www.synq-audio.com | <https://www.facebook.com/synq.audio/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved.
This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental
General : Dimensions (cm)	10.5 x 11 x 4.42 cm
General : Weight (kg)	0.45
General : Color	black
General : Powerinput	No
General : Energy Label	No
General : Power consumption W	No
General : Display	none
General : Fixation	No
General : RU	No
General : IP rating	indoor
Control : Type included remote	No
Control : optional remote	No
Audio : min. frequency (Hz)	20
Audio : max. frequency (Hz)	20000
Audio : max. output channels	2
Connections : input	2 x 3-Pin XLR, JACK, RCA
Connections : output	2 x 3-Pin XLR
Connections : XLR 3 pin	Yes
Connections : XLR 5 pin	No
Connections : rca	Yes
Connections : jack	Yes
Connections : speakon	No
Connections : Power Conn.	No
Connections : usb	No
Connections : wifi	no
Connections : bluetooth	No
Function : equalizer	No
Function : sound effects	No
Function : crossover	none
Function : bridge mode	No
Function : DSP	No
Function : limiter	No
EANCode	5420025602792
Discontinued	No

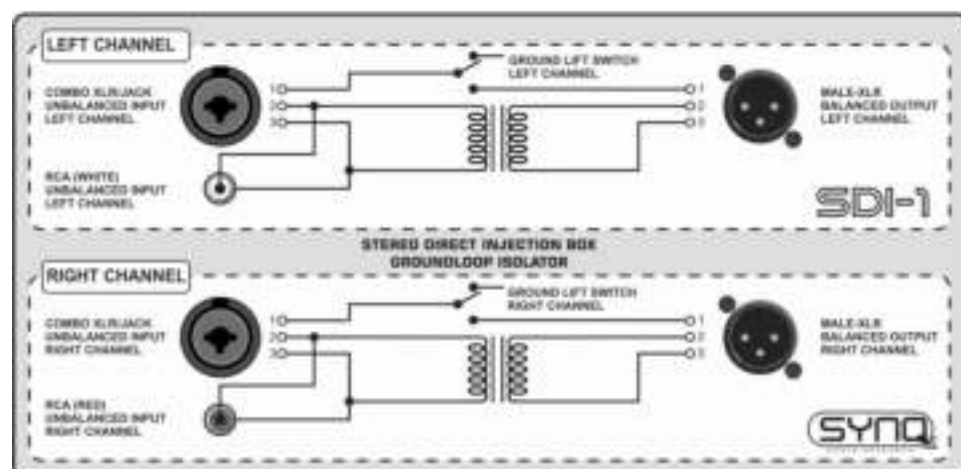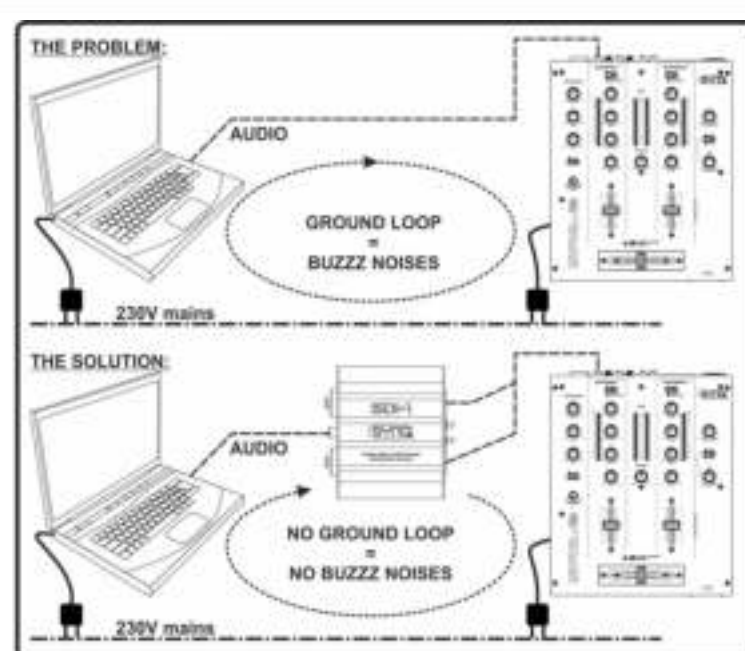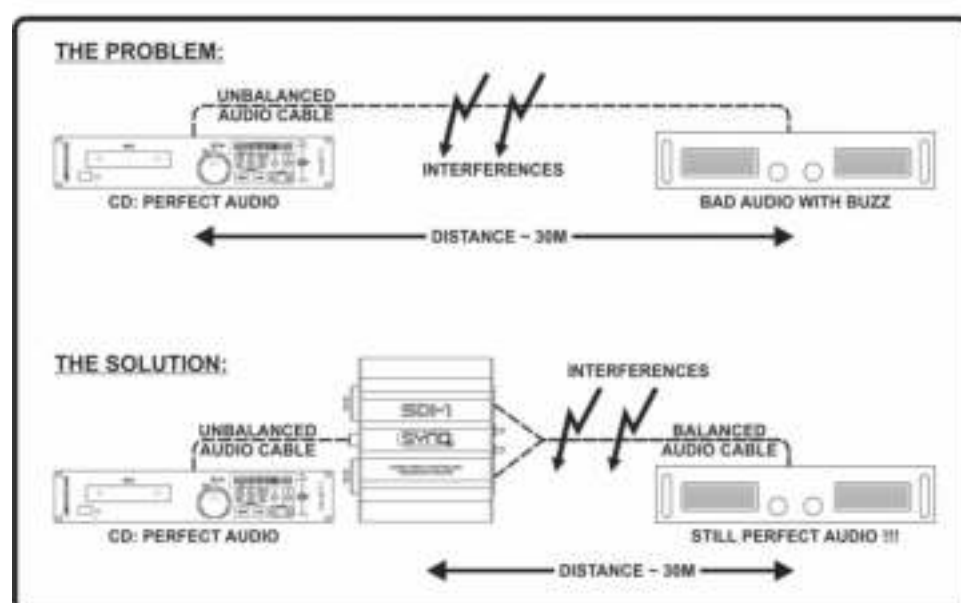

www.synq-audio.com | <https://www.facebook.com/synq.audio/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.