USB | PC connect

OMNITRONIC BD-1390/1380 USB Turntable bk

Belt drive DJ turntable with USB interface and recording software, black

- USB interface
- Incl. recording software
- Belt drive
- Switchable phono/line output
- Delivery includes pick-up system and slipmat

silver black

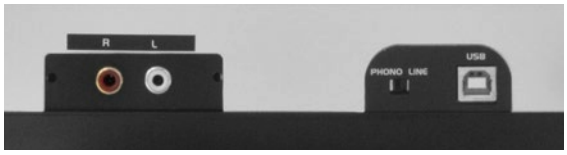

Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	8 W
Type:	manual turntable
Drive method:	belt drive
Motor:	DC motor
Platter:	plastic, d=330 mm
Speed:	33 1/3 RPM and 45 RPM
Change time between speeds:	<1 sec
Start time & Stop time:	<1 sec
Pitch adjustment:	±10 %
Wow and flutter:	<0.25 %
Rumble:	>50 dB DIN B
Tone arm:	S-shape with Cardan's suspension
Tone arm length:	220 mm
Overhang:	10 mm
Anti-skating range:	0-4 g
Stylus pressure range:	3-4 g
Applicable cartridge weight:	6-10 g
Phono output level:	1.5-3.6 mV/ 1 kHz 5 cm/sec
Line output level:	90-216 mV/ 1 kHz 5 cm/sec
Channel separation:	>15 dB
Output connectors:	RCA, USB type B
Dimensions:	450 x 360 x 145 mm
Weight:	4 kg

No. 10603041 ..... BD-1390, black
No. 10603043 ..... BD-1380, silver

OMNITRONIC BD-1520/1550 Turntable

Belt drive DJ turntable, black

- Pick-up system included
- Remote start possible
- Quick start
- Dustcover included
- Delivery includes slipmat

silver black

Technical specifications:

Type:	Manual turntable
Drive method:	Belt drive
Motor:	DC motor
Speed:	33 1/3 RPM and 45 RPM
Change time between the speeds:	33 -> 45 RPM in <1 sec
	45 -> 33 RPM in <5 sec
Pitch adjustment:	± 10 %
Initial torque:	>650 g/cm
Wow and flutter:	<0.25 %
Start time:	<1 sec
Stop time:	<1 sec
Rumble:	50 dB DIN B
Platter:	Outer diameter 320 mm
	Weight 682 g
Tonearm:	S-shape with Cardan's suspension
Tonearm length:	234 mm
Overhang:	16 mm
Adjustable stylus pressure:	0-4 g
Anti-skating range:	0-7 g
Power supply:	230 V AC, 50 Hz ~
	115 V/60 Hz
Maximum starting current:	260 mA
Power consumption:	8 W
Output connectors:	RCA, 6.3 mm jack
Dimensions:	450 x 352 x 148 mm
Weight:	10 kg

No. 10603045 ..... BD-1520, black
No. 10603046 ..... BD-1550, silver

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.